


MICHELIN® Pilot® Super Sport

Born from endurance racing, MICHELIN® Pilot® Super Sport tires give you the exhilaration of driving the best-performing street tire in the world.



SUMMER TIRE

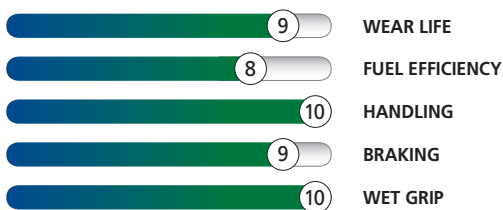

BENEFITS OF MICHELIN® PILOT® SUPER SPORT TIRES:

- Up to 12% Better Handling than Leading Competitors.¹**
 Inspired by the same engineering that has powered 14 consecutive victories at 24 Hours of Le Mans.
- Up to 2x Longer-Lasting than Leading Competitors.¹**
 Optimized through technology of Variable Contact Patch 2.0 and Twaron® belt package for long, even wear.
- Better Braking than Leading Competitors.¹** Bi-compound delivers excellent dry braking using Le Mans-inspired compound on the outer shoulder and the latest generation of wet-oriented elastomers on the inner portion of the tread.

Popular Replacement Market Fitments:

Porsche 997 • BMW 3 Series • Audi R8

¹ Based on commissioned third-party testing conducted by TÜV Automotive and DEKRA Test Center of MICHELIN® Pilot® Super Sport tires vs. Bridgestone® Potenza® RE050A, Continental® ContiSportContact™ 5P, Dunlop® SP Sport Maxx® GT, Goodyear® Eagle® F1 Asymmetric and Pirelli® P Zero™ tires.

Some vehicles come from the vehicle manufacturer with "split fitments" — meaning different size tires on the front and rear axles. Because these tires cannot be rotated as recommended by Michelin, the mileage warranty on each rear tire will cover half the number of miles as the standard mileage warranty for that particular tire design.



MICHELIN® Pilot® Super Sport

Tire Size	Service Description	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @ 45 mph	Max Load Single (lbs@psi)	O.E. Fitments	Available
205/45ZR17/XL	(88Y)	30661	6.5 – 7.5	8.1 on 7.0	24.3	10.0	858	1235@50		1Q 2012
215/45ZR17/XL	(91Y)	72102	7.0 – 8.0	8.4 on 7.0	24.7	10.0	844	1356@50		
225/45ZR17/XL	(94Y)	89738	7.0 – 8.5	8.9 on 7.5	25.0	10.0	833	1477@50		
235/45ZR17/XL	(99Y)	63248	7.5 – 9.0	9.3 on 8.0	25.4	10.0	821	1609@50		
245/40ZR17/XL	(95Y)	45737	8.0 – 9.5	9.8 on 8.5	24.7	10.0	841	1521@50		
245/45ZR17/XL	(99Y)	24186	7.5 – 9.0	9.6 on 8.0	25.7	10.0	810	1709@50		1Q 2012
205/40ZR18/XL	(86Y)	82039	7.0 – 8.0	8.4 on 7.5	24.5	10.0	851	1168@50		1Q 2012
215/40ZR18/XL	(89Y)	31461	7.0 – 8.5	8.6 on 7.5	24.8	10.0	840	1279@50		1Q 2012
225/40ZR18/XL	(92Y)	43199	7.5 – 9.0	9.1 on 8.0	25.1	10.0	829	1389@50		
225/45ZR18/XL	(95Y)	15317	7.0 – 8.5	8.9 on 7.5	25.9	10.0	802	1521@50		
225/50ZR18/XL	(99Y)	37359	6.0 – 8.0	9.2 on 7.0	26.9	10.0	774	1709@50		
235/40ZR18/XL	(95Y)	01966	8.0 – 9.5	9.5 on 8.5	25.4	10.0	819	1521@50		
235/50ZR18/XL	(101Y)	24645	6.5 – 8.5	9.7 on 7.5	27.3	10.0	762	1819@50		1Q 2012
245/35ZR18/XL	(92Y)	12800	8.0 – 9.5	9.8 on 8.5	24.8	10.0	840	1389@50		1Q 2012
245/40ZR18/XL	(97Y)	03264	8.0 – 9.5	9.8 on 8.5	25.7	10.0	809	1609@50		
245/45ZR18/XL	(100Y)	91157	7.5 – 9.0	9.6 on 8.0	26.7	10.0	780	1764@50		
255/35ZR18/XL	(94Y)	07807	8.5 – 10.0	10.2 on 9.0	25.0	10.0	832	1477@50		
255/40ZR18/XL	(99Y)	14912	8.5 – 10.0	10.2 on 9.0	26.0	10.0	799	1709@50		
265/35ZR18/XL	(97Y)	34639	9.0 – 10.5	10.7 on 9.5	25.3	10.0	822	1609@50		
265/40ZR18/XL	(101Y)	05512	9.0 – 10.5	10.7 on 9.5	26.3	10.0	790	1819@50		
275/35ZR18/XL	(99Y)	99872	9.0 – 11.0	10.9 on 9.5	25.6	10.0	814	1709@50		
285/35ZR18/XL	(101Y)	20497	9.5 – 11.0	11.4 on 10.0	25.9	10.0	804	1819@50		
225/35ZR19/XL	(88Y)	63973	7.5 – 9.0	9.1 on 8.0	25.2	10.0	824	1235@50		
225/40ZR19/XL	(93Y)	18640	7.5 – 9.0	9.1 on 8.0	26.1	10.0	797	1432@50		
225/45ZR19/XL	(96Y)	62936	7.0 – 8.5	8.9 on 7.5	27.0	10.0	771	1565@50		
235/30ZR19/XL	(86Y)	21907	8.5 – 8.5	9.5 on 8.5	24.6	10.0	845	1168@50		1Q 2012
235/35ZR19/XL	(91Y)	16289	8.0 – 9.5	9.5 on 8.5	25.5	10.0	817	1356@50		
245/35ZR19/XL	(93Y)	15466	8.0 – 9.5	9.8 on 8.5	25.8	10.0	807	1432@50		
245/40ZR19/XL	(98Y)	36814	8.0 – 9.5	9.8 on 8.5	26.7	10.0	778	1653@50		
255/30ZR19/XL	(91Y)	66839	8.5 – 9.5	10.2 on 9.0	25.1	10.0	829	1356@50		1Q 2012
255/35ZR19/XL	(96Y)	31567	8.5 – 10.0	10.2 on 9.0	26.0	10.0	799	1565@50		
255/40ZR19/XL	(100Y)	16126	8.5 – 10.0	10.2 on 9.0	27.1	10.0	769	1764@50		1Q 2012
255/45ZR19/XL	(99Y)	48181	8.0 – 9.5	10.0 on 8.5	28.1	10.0	741	1984@50		1Q 2012
265/30ZR19/XL	(93Y)	16609	9.0 – 10.0	10.7 on 9.5	25.3	10.0	822	1432@50		
265/35ZR19/XL	(98Y) MO	59800	9.0 – 10.5	10.7 on 9.5	26.3	10.0	790	1653@50	MB	4Q 2012
265/35ZR19/XL	(98Y)	75928	9.0 – 10.5	10.7 on 9.5	26.3	10.0	790	1653@50		
265/40ZR19/XL	(102Y) *	13092	9.0 – 10.5	10.7 on 9.5	27.4	9.0	760	1873@51	BM	4Q 2012
275/30ZR19/XL	(96Y)	99229	9.0 – 10.0	10.9 on 9.5	25.6	10.0	814	1565@50		
275/35ZR19/XL	(100Y)	22002	9.0 – 11.0	10.9 on 9.5	26.6	10.0	783	1764@50		
275/40ZR19/XL	(105Y)	84944	9.0 – 11.0	10.9 on 9.5	27.7	10.0	751	2039@50		1Q 2012

Continued ➤

UTQG = 300/AA/A
 Available Sidewall = BSW

Original Equipment Key: BM = BMW, FER = Ferrari, MB = Mercedes-Benz
 Service Description Key: * = BMW, K1 & K2 = Ferrari, MO = Mercedes-Benz
 XL = Extra Load

See pages 120 – 121 for
 important product information.

MICHELIN® Pilot® Super Sport

Tire Size	Service Description	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width (inches)	Overall Diameter (inches)	Tread Depth (in/32nds)	Rev/Mile @ 45 mph	Max Load Single (lbs@psi)	O.E. Fitments	Available
285/40ZR19/XL	(107Y)	09710	9.5 – 11.0	11.4 on 10.0	28.0	10.0	743	2149@50		1Q 2012
295/30ZR19/XL	(100Y)	78686	10.0 – 11.0	11.9 on 10.5	26.0	10.0	799	1764@50		
295/35ZR19/XL	(104Y) *	10261	10.0 – 11.5	11.9 on 10.5	27.1	9.0	767	1984@51	BM	4Q 2012
305/30ZR19/XL	(102Y)	60721	10.5 – 11.5	12.3 on 11.0	26.3	10.0	792	1873@50		
325/30ZR19/XL	(105Y)	14566	11.0 – 12.0	13.0 on 11.5	26.7	9.0	778	2039@50		1Q 2012
345/30ZR19/XL	(109Y)	75804	11.5 – 12.5	13.8 on 12.0	27.2	9.0	765	2271@50		1Q 2012
235/35ZR20/XL	(92Y) K1	07688	8.0 – 9.5	9.5 on 8.5	26.5	10.0	786	1389@50	FER	
245/35ZR20/XL	(95Y) K1	20206	8.0 – 9.5	9.8 on 8.5	26.8	9.0	777	1521@50	FER	
245/45ZR20/XL	(103Y)	26093	7.5 – 9.0	9.6 on 8.0	28.7	10.0	726	1929@50		1Q 2012
255/35ZR20/XL	(97Y) K2	48527	8.5 – 10.0	10.2 on 9.0	27.0	7.0	770	1609@50	FER	1Q 2012
255/35ZR20/XL	(97Y)	79020	8.5 – 10.0	10.2 on 9.0	27.0	10.0	770	1609@50		
255/40ZR20/XL	(101Y)	07860	8.5 – 10.0	10.2 on 9.0	28.0	10.0	742	1819@50		1Q 2012
255/45ZR20/XL	(105Y)	12845	8.0 – 9.5	10.0 on 8.5	29.1	10.0	716	2039@50		1Q 2012
265/30ZR20/XL	(94Y)	97466	9.0 – 10.0	10.7 on 9.5	26.3	10.0	791	1477@50		1Q 2012
265/35ZR20/XL	(99Y) *	78123	9.0 – 10.5	10.7 on 9.5	27.3	9.0	761	1709@50	BM	4Q 2012
265/35ZR20/XL	(99Y)	97466	9.0 – 10.5	10.7 on 9.5	27.3	10.0	761	1477@50		1Q 2012
275/30ZR20/XL	(97Y)	32549	9.0 – 10.0	10.9 on 9.5	26.5	10.0	784	1609@50		
275/35ZR20/XL	(102Y)	09106	9.0 – 11.0	10.9 on 9.5	27.6	10.0	755	1873@50		
285/25ZR20/XL	(93Y)	23958	10.5 – 10.5	11.6 on 10.5	25.6	10.0	813	1432@50		
285/35ZR20/XL	(104Y)	10827	9.5 – 10.5	11.4 on 10.0	26.8	10.0	777	1984@50		1Q 2012
285/30ZR20/XL	(99Y) K1	71509	9.5 – 10.5	11.4 on 10.0	26.8	7.0	777	1709@50	FER	
285/30ZR20/XL	(99Y)	61244	9.5 – 10.5	11.4 on 10.0	26.8	10.0	777	1709@50		
295/25ZR20/XL	(95Y)	42877	10.0 – 11.0	11.9 on 10.5	25.8	10.0	805	1521@50		
295/30ZR20/XL	(101Y) *	10427	10.0 – 11.0	11.9 on 10.5	27.0	9.0	770	1819@50	BM	4Q 2012
295/30ZR20/XL	(101Y) MO	02623	10.0 – 11.0	11.9 on 10.5	27.0	10.0	770	1819@50	MB	4Q 2012
295/35ZR20	(101Y) K1	28274	10.0 – 11.5	11.9 on 10.5	28.1	9.0	740	1819@51	FER	
295/35ZR20/XL	(105Y) K1	09045	10.0 – 11.5	11.9 on 10.5	28.1	9.0	740	2039@50	FER	
315/35ZR20/XL	(110Y) K1	19605	10.5 – 12.5	12.6 on 11.0	28.7	7.0	726	2336@50	FER	
315/35ZR20/XL	(110Y) K2	79340	10.5 – 12.5	12.6 on 11.0	28.7	10.0	726	2336@50	FER	1Q 2012
335/30ZR20/XL	(108Y)	91621	11.5 – 12.5	13.5 on 12.0	28.0	9.0	744	2205@50		1Q 2012
345/30ZR20	(106Y)	65438	12.0 – 13.0	14.0 on 12.5	28.1	10.0	716	2094@51		
245/30ZR21/XL	(91Y)	78354	8.0 – 9.0	9.8 on 8.5	26.8	10.0	776	1356@50		1Q 2012
255/30ZR21/XL	(93Y)	14850	8.5 – 9.5	10.2 on 9.0	27.1	10.0	769	1432@50		
265/30ZR21/XL	(96Y)	05969	9.0 – 10.0	10.7 on 9.5	27.3	10.0	762	1565@50		
295/25ZR21/XL	(96Y)	48747	10.0 – 11.0	11.9 on 10.5	26.8	10.0	776	1565@50		
295/30ZR21/XL	(102Y)	01604	10.0 – 11.0	11.9 on 10.5	28.0	10.0	743	1873@50		
305/25ZR21/XL	(98Y)	03596	10.5 – 11.5	12.3 on 11.0	26.0	10.0	799	1653@50		1Q 2012
235/30ZR22/XL	(90Y)	04064	8.5 – 8.5	9.5 on 8.5	27.6	10.0	754	1322@50		
265/30ZR22/XL	(97Y)	19225	9.0 – 10.0	10.7 on 9.5	28.3	10.0	735	1609@50		

See pages 120 – 121 for important product information.

UTQG = 300/AA/A

Original Equipment Key: BM = BMW, FER = Ferrari, MB = Mercedes-Benz

Service Description Key: * = BMW, K1 & K2 = Ferrari, MO = Mercedes-Benz

XL = Extra Load

Available Sidewall = BSW